

TKPP...H110 Horizontal Tee

Overview:

Application

Branching out cable routes.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

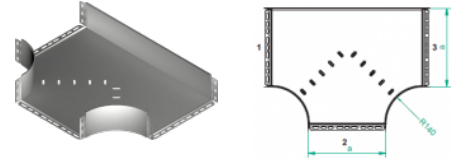

For installation use Screw Sets SGK M6×12 or SG M6×12.

In case of special orders please specify dimensions: a, b, etc.

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
TKPP100H110	100	123614	10	2,21
TKPP150H110	150	123714	10	2,72
TKPP200H110	200	123814	10	3,28
TKPP300H110	300	123914	4	4,61
TKPP400H110	400	124014	4	6,12
TKPP500H110	500	124114	2	7,92
TKPP600H110	600	124214	2	9,94