

LUBJ...H110 90° Vertical Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

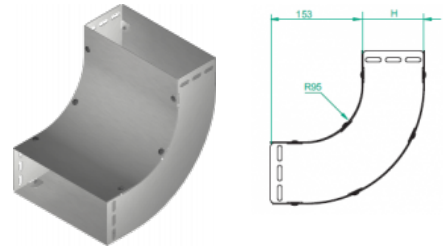

For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| LUBJ100H110 | 100 | 126910 | 2 | 1,62 |
| LUBJ150H110 | 150 | 126915 | 2 | 1,97 |
| LUBJ200H110 | 200 | 126920 | 2 | 2,32 |
| LUBJ300H110 | 300 | 126930 | 2 | 3,01 |
| LUBJ400H110 | 400 | 126940 | 2 | 3,71 |
| LUBJ500H110 | 500 | 126950 | 2 | 4,39 |
| LUBJ600H110 | 600 | 126960 | 2 | 5,09 |