

LUBP...H110 90° Vertical Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

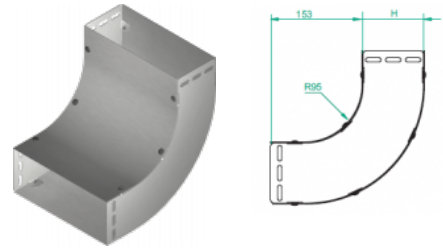

For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUBP100H110	100	127010	10	2,43
LUBP150H110	150	127015	10	2,94
LUBP200H110	200	127020	4	3,48
LUBP300H110	300	127030	4	4,51
LUBP400H110	400	127040	2	5,56
LUBP500H110	500	127050	2	6,57
LUBP600H110	600	127060	2	7,62