

LUPP...H110 90° Vertical Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

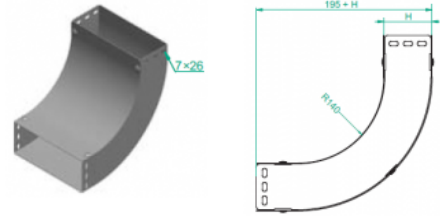

For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUPP100H110	100	126414	10	2,67
LUPP150H110	150	126514	10	3,25
LUPP200H110	200	126614	4	3,82
LUPP300H110	300	126714	4	4,96
LUPP400H110	400	126814	2	6,12
LUPP500H110	500	126914	2	7,24
LUPP600H110	600	127014	2	8,40