

## LUMBJ...H110 90° Vertical Bend

### Overview:

**Application**

Diversions in cable routing.

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

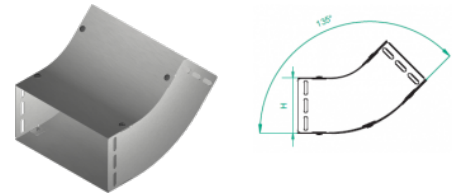

**For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling**

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUMBJ100H110	100	127110	2	1,13
LUMBJ150H110	150	127115	2	1,37
LUMBJ200H110	200	127120	2	1,62
LUMBJ300H110	300	127130	2	2,10
LUMBJ400H110	400	127140	2	2,59
LUMBJ500H110	500	127150	2	3,07
LUMBJ600H110	600	127160	2	3,55