

LUMBP...H110 90° Vertical Bend

Overview:

Application

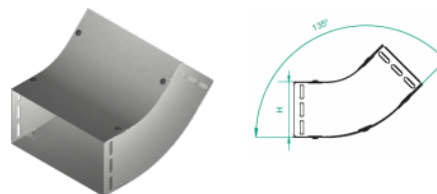
Diversions in cable routing.

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)


For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

 Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUMBP100H110	100	127210	10	1,61
LUMBP150H110	150	127215	10	1,97
LUMBP200H110	200	127220	4	2,34
LUMBP300H110	300	127230	4	3,16
LUMBP400H110	400	127240	2	3,89
LUMBP500H110	500	127250	2	4,59
LUMBP600H110	600	127260	2	5,33