

## LLBJ...H110 Adjustable Vertical Bend

### Overview:

**Application**

Diversions in cable routing. Full-range angle adjustment with a lock.

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)

**L**- powder coating in a full range of colours (PC)

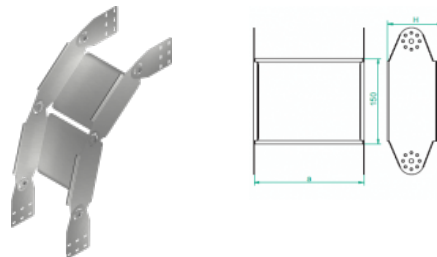

**For installation use Screw Sets SGK M6×12 or SG M6×12.**

**Adjustable Vertical Bend is delivered fully assembled together with:**

**2 Adjustable Vertical Bend Elements**

**4 pairs of Angle Connectors**

**6 sets of screws**

### Versions:

Sheet thickness: **1,0 mm**

| Symbol      | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| LLBJ100H110 | 100          | 127310           | 2               | 2,04         |
| LLBJ150H110 | 150          | 127315           | 2               | 2,23         |
| LLBJ200H110 | 200          | 127320           | 2               | 2,39         |
| LLBJ300H110 | 300          | 127330           | 2               | 2,73         |
| LLBJ400H110 | 400          | 127340           | 2               | 3,04         |
| LLBJ500H110 | 500          | 127350           | 2               | 3,39         |
| LLBJ600H110 | 600          | 127360           | 2               | 3,70         |