

LLBP...H110 Adjustable Vertical Bend

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

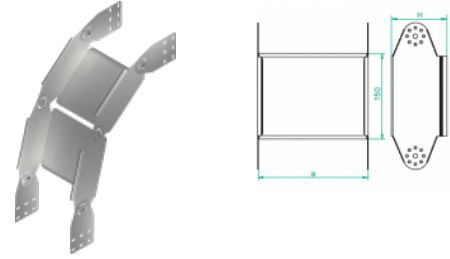

For installation use Screw Sets SGK M6×12 or SG M6×12.

Adjustable Vertical Bend is delivered fully assembled together with:

2 Adjustable Vertical Bend Elements

4 pairs of Angle Connectors

6 sets of screws

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLBP100H110	100	127410	10	2,54
LLBP150H110	150	127415	10	3,45
LLBP200H110	200	127420	4	3,61
LLBP300H110	300	127430	4	3,11
LLBP400H110	400	127440	2	4,63
LLBP500H110	500	127450	2	5,13
LLBP600H110	600	127460	2	5,62