

## ELBP...H110 Adjustable Vertical Bend Element

### Overview:

#### Application

Diversions in cable routing. Full-range angle adjustment with a lock.

#### Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)

**L**- powder coating in a full range of colours (PC)

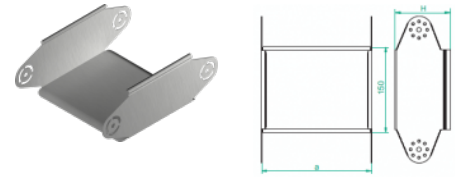

**For installation use Screw Sets SGK M6×12 or SG M6×12.**

**Possibility of creating adjustable vertical bends of any internal radius through adding up bend elements**

### Versions:

Sheet thickness: **1,5 mm**

| Symbol             | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|--------------------|--------------|------------------|-----------------|--------------|
| <b>ELBP100H110</b> | <b>100</b>   | <b>127610</b>    | <b>10</b>       | <b>0,87</b>  |
| <b>ELBP150H110</b> | <b>150</b>   | <b>127615</b>    | <b>10</b>       | <b>0,99</b>  |
| <b>ELBP200H110</b> | <b>200</b>   | <b>127620</b>    | <b>10</b>       | <b>1,12</b>  |
| <b>ELBP300H110</b> | <b>300</b>   | <b>127630</b>    | <b>4</b>        | <b>1,36</b>  |
| <b>ELBP400H110</b> | <b>400</b>   | <b>127640</b>    | <b>4</b>        | <b>1,63</b>  |
| <b>ELBP500H110</b> | <b>500</b>   | <b>127650</b>    | <b>4</b>        | <b>1,88</b>  |
| <b>ELBP600H110</b> | <b>600</b>   | <b>127660</b>    | <b>4</b>        | <b>2,11</b>  |