

OPNJ...H110 Vertical Bypass

Overview:

Application

Bypassing mechanical obstacles in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

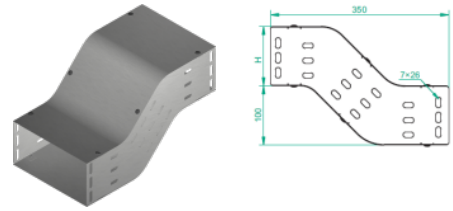

For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
OPNJ100H110	100	123910	2	1,14
OPNJ150H110	150	123915	2	1,40
OPNJ200H110	200	123920	2	1,66
OPNJ300H110	300	123930	2	2,20
OPNJ400H110	400	123940	2	2,72
OPNJ500H110	500	123950	2	3,46
OPNJ600H110	600	123960	2	3,80