

OPNBJ...H110 Vertical Bypass

Overview:

Application

Bypassing mechanical obstacles in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

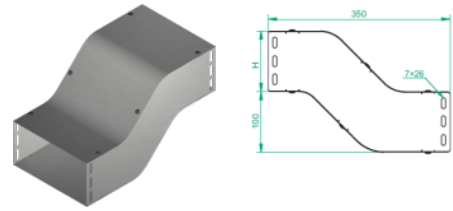

For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
OPNBJ100H110	100	127910	2	1,14
OPNBJ150H110	150	127915	2	1,40
OPNBJ200H110	200	127920	2	1,66
OPNBJ300H110	300	127930	2	2,20
OPNBJ400H110	400	127940	2	2,72
OPNBJ500H110	500	127950	2	3,46
OPNBJ600H110	600	127960	2	3,80