

KRPBJ...H110 Vertical Elbow - Right

Overview:

Application

Transition of tray cable run in the horizontal plane to the vertical plane.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

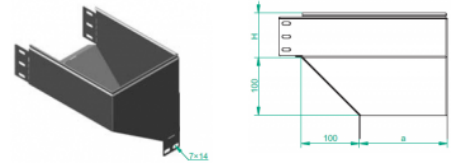

For installation use Screw Sets SGK M6×12 or SG M6×12.

Quick and convenient installation by the use of dismantled parts

This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|--------------|--------------|------------------|-----------------|--------------|
| KRPBJ100H110 | 100 | 128310 | 4 | 1,08 |
| KRPBJ150H110 | 150 | 128315 | 4 | 1,64 |
| KRPBJ200H110 | 200 | 128320 | 4 | 2,17 |
| KRPBJ300H110 | 300 | 128330 | 2 | 3,56 |
| KRPBJ400H110 | 400 | 128340 | 2 | 4,65 |
| KRPBJ500H110 | 500 | 128350 | 2 | 5,95 |
| KRPBJ600H110 | 600 | 128360 | 2 | 7,15 |