

TRBJ...H110 Vertical Tee -Lengthwise

Overview:

Application

Branching out cable routes. Transition of tray cable run from the horizontal to the vertical plane.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

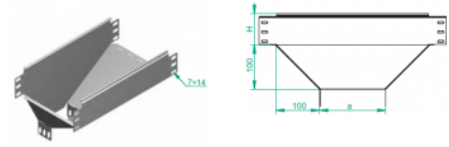

For installation use Screw Sets SGK M6×12 or SG M6×12.

Quick and convenient installation by the use of dismantled parts

This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| TRBJ100H110 | 100 | 128510 | 4 | 1,26 |
| TRBJ150H110 | 150 | 128515 | 4 | 1,91 |
| TRBJ200H110 | 200 | 128520 | 4 | 2,46 |
| TRBJ300H110 | 300 | 128530 | 2 | 3,83 |
| TRBJ400H110 | 400 | 128540 | 2 | 5,08 |
| TRBJ500H110 | 500 | 128550 | 1 | 6,00 |
| TRBJ600H110 | 600 | 128560 | 1 | 6,70 |