

ELL...H30 Adjustable Vertical Bend Element

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

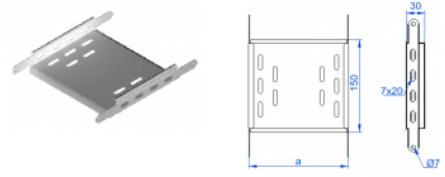

For installation use Screw Sets SGK M6×10 or SG M6×10.

Possibility of creating adjustable vertical bends of any internal radius through adding up bend elements

Versions:

Sheet thickness: **0,7 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELL50H30	50	132505	4	0,16
ELL100H30	100	132510	4	0,22
ELL150H30	150	132515	4	0,26
ELL200H30	200	132520	4	0,35
ELL300H30	300	132530	4	0,47

Connected products:



ELJ...H30 Adjustable Vertical Bend Element



ELBJ...H30 Adjustable Vertical Bend Element



ELBL...H30 Adjustable Vertical Bend Element



SM... Screw Set