

RKSBJ...H110 Straight Reducer

Overview:

Application

Reducing/extending widths of cable runs

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

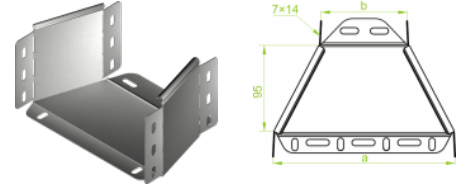

**For installation use Screw Sets SGK M6×12 or SG M6×12.
In case of special orders please specify dimensions a and b.**

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.	Size b [mm]
RKSBJ150/100H110	150	129315	10	0,30	100
RKSBJ200/100H110	200	129720	10	0,37	100
RKSBJ200/150H110	200	129820	10	0,39	150
RKSBJ300/200H110	300	129730	10	0,41	200
RKSBJ400/300H110	400	129340	6	0,49	300
RKSBJ500/400H110	500	129350	6	0,57	400
RKSBJ600/500H110	600	129360	6	0,65	500