

## LZLC...H50 Adjustable Vertical Bend

### Overview:

**APPLICATION**

Diversion in cable routing. Full-range angle adjustment with a lock.

**Material**


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

**Available to order:**

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**To install adjustable vertical bend use sets of Screw SGF M6x12**

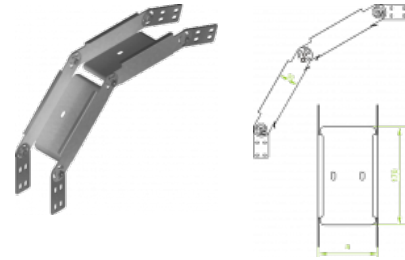

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZLC50H50	50	353105	10	2,20
LZLC100H50	100	353110	10	2,46
LZLC200H50	200	353120	10	3,01
LZLC300H50	300	353130	4	3,54
LZLC400H50	400	353140	4	4,09
LZLC500H50	500	353150	4	4,62
LZLC600H50	600	353160	4	5,16