

## ELZP...H50 Adjustable Vertical Bend Element

### Overview:

#### APPLICATION

Diversion in cable routing. Full-range angle adjustment with a lock.

#### Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)


#### Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

To install adjustable vertical bend element use Screw Sets  
 SM M8x16

Capability of creating adjustable vertical bends of any  
 internal radius using articulated connectors.

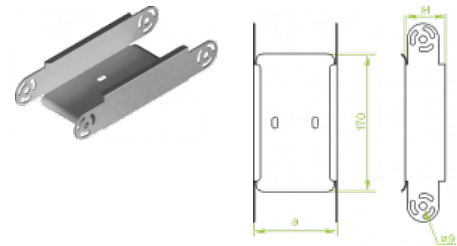

### Versions:

Sheet thickness: **1,5 mm**

| Symbol     | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|------------|--------------|------------------|-----------------|--------------|
| ELZP50H50  | 50           | 353205           | 10              | 0,36         |
| ELZP100H50 | 100          | 353210           | 10              | 0,46         |
| ELZP200H50 | 200          | 353220           | 10              | 0,67         |
| ELZP300H50 | 300          | 353230           | 4               | 0,87         |
| ELZP400H50 | 400          | 353240           | 4               | 1,07         |
| ELZP500H50 | 500          | 353250           | 4               | 1,27         |
| ELZP600H50 | 600          | 353260           | 4               | 1,48         |