

ELZC...H50 Adjustable Vertical Bend Element

Overview:

APPLICATION

Diversion in cable routing. Full-range angle adjustment with a lock.

Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)


Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

To install adjustable vertical bend element use Screw Sets SM M8x16

Capability of creating adjustable vertical bends of any internal radius using articulated connectors.

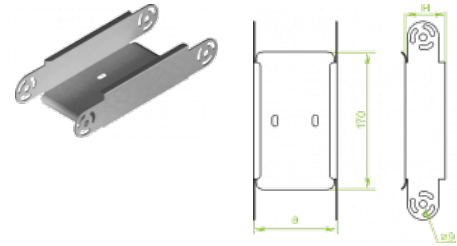

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELZC50H50	50	353305	10	0,48
ELZC100H50	100	353310	10	0,61
ELZC200H50	200	353320	10	0,88
ELZC300H50	300	353330	4	1,15
ELZC400H50	400	353340	4	1,42
ELZC500H50	500	353350	4	1,69
ELZC600H50	600	353360	4	1,96