

LZLP...H200 Adjustable Vertical Bend

Overview:

APPLICATION

Diversion in cable routing. Full-range angle adjustment with a lock.

Material


Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**To install adjustable vertical bend use sets of Screw SGF
M8x14**

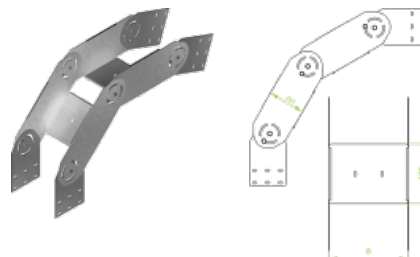

Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZLP200H200	200	373020	10	7,53
LZLP300H200	300	373030	4	8,07
LZLP400H200	400	373040	4	8,60
LZLP500H200	500	373050	4	9,13
LZLP600H200	600	373060	4	9,67