

WWCT/WWCTO... Bracket

Overview:

APPLICATION

Supporting cable trays and ladders, pipes, and other systems' components under very heavy load


Material

Hot-dip galv. steel to PN-EN ISO 1461:2011 (HDG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

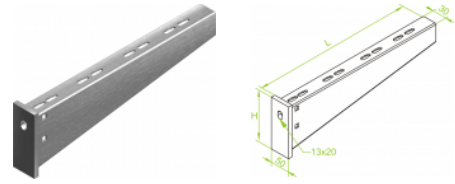

Versions:

| Symbol | Length L [m] | Catalogue number | Quantity in box | Height H [mm] | Weight 1 pc. | Maximum load Fmax[kN] |
|----------------|--------------|------------------|-----------------|---------------|--------------|-----------------------|
| WWCT/WWCTO 200 | 210 | 713020 | 10 | 90 | 0,70 | 5,50 |
| WWCT/WWCTO 300 | 310 | 713030 | 8 | 110 | 0,95 | 5,50 |
| WWCT/WWCTO 400 | 410 | 713040 | 6 | 130 | 1,49 | 5,00 |
| WWCT500 | 510 | 713050 | 1 | 145 | 1,70 | 5,00 |
| WWCT600 | 610 | 713060 | 1 | 165 | 2,38 | 4,50 |
| WWCT700 | 710 | 713070 | 1 | 185 | 2,60 | 4,50 |
| WWCT800 | 810 | 713080 | 1 | 195 | 3,38 | 4,00 |
| WWCT900 | 910 | 713090 | 1 | 205 | 3,71 | 4,00 |
| WWCT1000 | 1010 | 713000 | 1 | 225 | 4,45 | 4,00 |