


## KAJ...H110 Cable Tray

### Overview:

**Application**  
Cable routing

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
E- stainless steel (SS)  
L- powder coating in a full range of colours (PC)

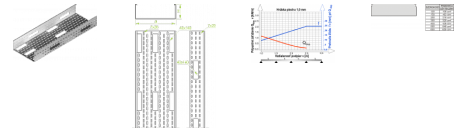

**Important! Joining cable tray sections together only through the use of connectors (lack of cut in the flange at the end of side profile). To install cable tray use Screw Sets SGK M6x12 or SG M6x12.**

**Benefits of the New System:**  
- large perforation in the tray side: of size 24 × 65mm, and in the bottom, sized 34 × 65mm, allow cable bundles to be pulled out from anywhere within the tray without the need to use any fittings  
- dense perforation for excellent heat transfer, designed to enable cable tray installation on supports from BAKS anywhere within the system  
- rounded tray flange edges with longitudinal ribbing allow the covers to snap firmly into place

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KAJ100H110/3	3000	100	180816	12	2,27	10800
KAJ150H110/3	3000	150	180916	6	2,60	16300
KAJ200H110/3	3000	200	181016	6	2,92	21800
KAJ300H110/3	3000	300	181116	6	3,57	32800
KAJ400H110/3	3000	400	181216	4	4,21	43800
KAJ500H110/3	3000	500	181316	2	4,86	54800
KAJ600H110/3	3000	600	181416	2	5,50	65800

### Connected products:



NO40x140 Cable Protection Ring