

WZKS... Bracket

Overview:

Application

Suspending wire mesh cable trays.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

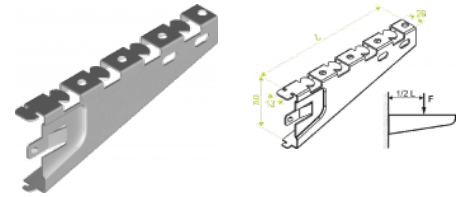

IMPORTANT!

Screwless assembly to the :

- construction made on support channels BAKS with 13x30 perforation and max thickness of material 3mm
- ceiling brackets WPCW/WPCO/WPCT... N and WSP
- Brackets WPT and WPL (assembled in vertical position)

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load Fmax[kN]
WZKS100	115	902410	50	0,16	1,30
WZKS150	165	902415	50	0,21	1,20
WZKS200	215	902420	30	0,29	1,00
WZKS300	315	902430	30	0,63	0,85
WZKS400	415	902440	30	0,78	0,80
WZKS500	515	902450	20	0,87	0,75
WZKS600	615	902460	20	1,02	0,70