

KKSMT...H100N 45° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

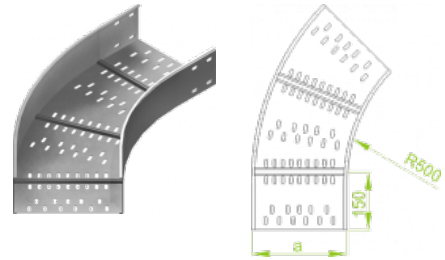

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKSMT200H100	200	220823	2	7,18
KKSMT300H100	300	220833	2	8,74
KKSMT400H100	400	220843	2	10,42
KKSMT500H100	500	220853	2	12,02
KKSMT600H100	600	220863	2	13,92