

LWKSM...H100N 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

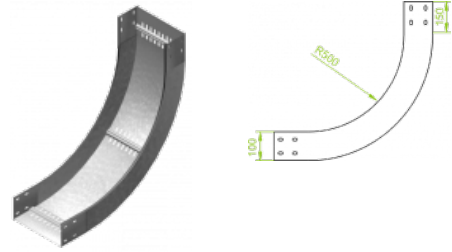

For joining fittings to cable tray use Straight Connectors for Fittings

LSSU... and Screw Sets SGK M8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.

FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

Versions:

Sheet thickness: 2,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LWKSM200H100N	200	221123	2	9,84
LWKSM300H100N	300	221133	2	11,04
LWKSM400H100N	400	221143	2	12,24
LWKSM500H100N	500	221153	2	13,50
LWKSM600H100N	600	221163	2	14,86