

ELKST...H100 Adjustable Vertical Bend Element

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

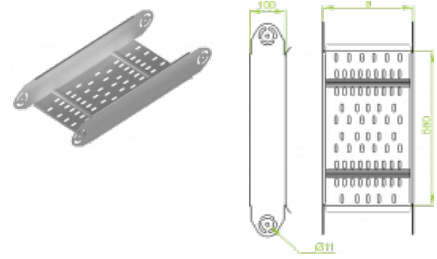

Capability of creating vertical bends of any internal radius through joining articulated connectors. For the installation of segments of adjustable vertical bend element use Screw Sets M10x20

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELKST200H100	200	221723	10	4,34
ELKST300H100	300	221733	4	4,64
ELKST400H100	400	221743	4	4,96
ELKST500H100	500	221753	4	5,24
ELKST600H100	600	221763	4	5,52