

OPZBJ...H50 Horizontal Bypass

Overview:

Application

Bypassing mechanical obstacles in cable routing

Material



Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)




For installation use Screw Sets SGK M6x12 or SG M6x12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
OPZBJ50H50	50	153701	2	0,55
OPZBJ100H50	100	153801	2	0,81
OPZBJ150H50	150	153901	2	1,07
OPZBJ200H50	200	154001	2	1,33
OPZBJ300H50	300	154201	2	1,87
OPZBJ400H50	400	154301	2	2,39
OPZBJ500H50	500	154401	2	3,13
OPZBJ600H50	600	154501	2	3,47

Connected products:

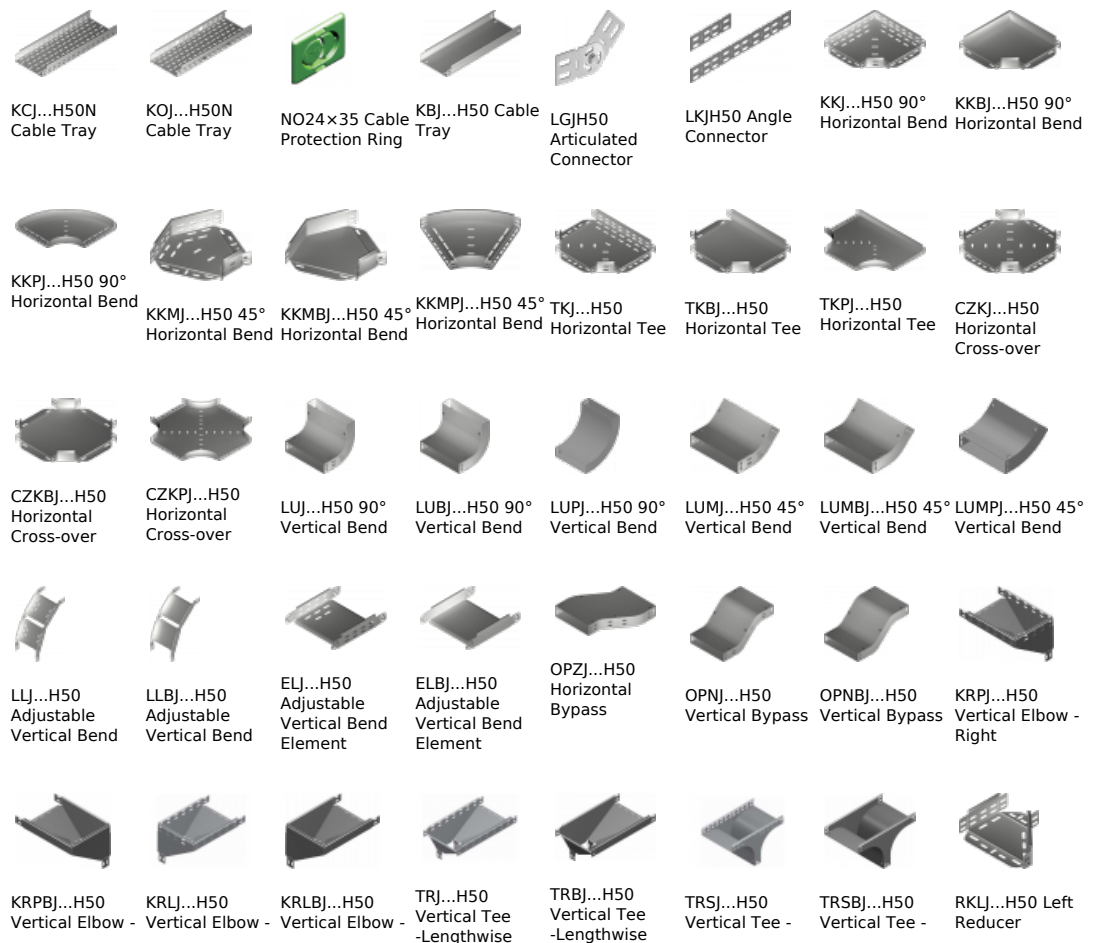

Right



RKLBJ...H50
Reducer

Left



RKPJ...H50
Reducer

Left



RKPBJ...H50
Right Reducer



RKSJ...H50
Straight
Reducer



RKSBJ...H50
Straight
Reducer

Crosswise



LRJH50 Corner
Connector

Crosswise



LRBJH50 Corner
Connector



TKDJ...H50
Add-on Tee



LRPJH50 Corner
Connector