

## KKSC...H110 90° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

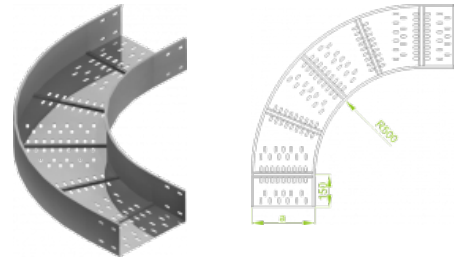

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
<b>KKSC200H110</b>	<b>200</b>	<b>230722</b>	<b>2</b>	<b>8,79</b>
<b>KKSC300H110</b>	<b>300</b>	<b>230732</b>	<b>2</b>	<b>10,89</b>
<b>KKSC400H110</b>	<b>400</b>	<b>230742</b>	<b>2</b>	<b>13,04</b>
<b>KKSC500H110</b>	<b>500</b>	<b>230752</b>	<b>2</b>	<b>15,43</b>
<b>KKSC600H110</b>	<b>600</b>	<b>230762</b>	<b>2</b>	<b>17,58</b>