

## KKSMC...H110 45° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

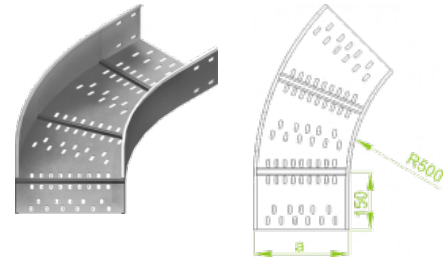

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
<b>KKSMC200H110</b>	<b>200</b>	<b>230822</b>	<b>2</b>	<b>6,26</b>
<b>KKSMC300H110</b>	<b>300</b>	<b>230832</b>	<b>2</b>	<b>7,63</b>
<b>KKSMC400H110</b>	<b>400</b>	<b>230842</b>	<b>2</b>	<b>9,00</b>
<b>KKSMC500H110</b>	<b>500</b>	<b>230852</b>	<b>2</b>	<b>10,54</b>
<b>KKSMC600H110</b>	<b>600</b>	<b>230862</b>	<b>2</b>	<b>12,25</b>