

## LZKSM...H110 90° Vertical Bend - External

### Overview:

**Application**

Diversion in cable routing

**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)


**L-** powder coating in a full range of colours (PC)

**For joining fittings to cable tray use Straight Connectors for Fittings**

**LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.**

**FEATURES & BENEFITS:**

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

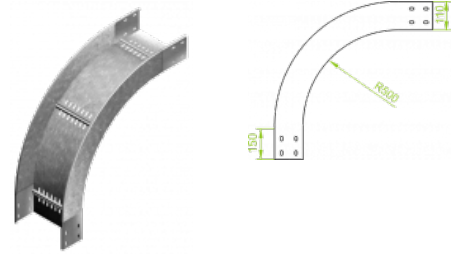

### Versions:

Sheet thickness: 2,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZKST200H110	200	231223	2	10,32
LZKST300H110	300	231233	2	11,52
LZKST400H110	400	231243	2	12,48
LZKST500H110	500	231253	2	13,98
LZKST600H110	600	231263	2	15,34