

LLKST...H110 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

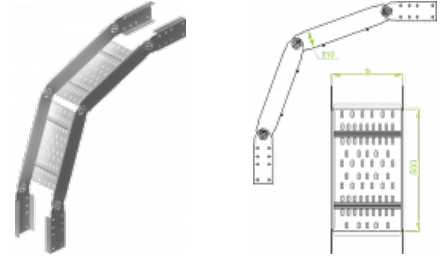

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLKST200H110	200	231623	10	13,62
LLKST300H110	300	231633	4	14,17
LLKST400H110	400	231643	4	14,68
LLKST500H110	500	231653	4	15,28
LLKST600H110	600	231663	4	15,72