

ELKSC...H110 Adjustable Vertical Bend Element

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

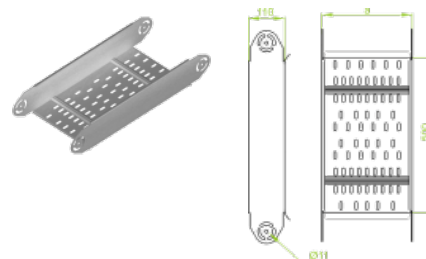

Capability of creating vertical bends of any internal radius through joining articulated connectors. For the installation of segments of adjustable vertical bend element use Screw Sets M10x20

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELKSC200H110	200	231722	10	3,15
ELKSC300H110	300	231732	4	3,36
ELKSC400H110	400	231742	4	3,58
ELKSC500H110	500	231752	4	3,82
ELKSC600H110	600	231762	4	4,04