

## KKSC...H120 90° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

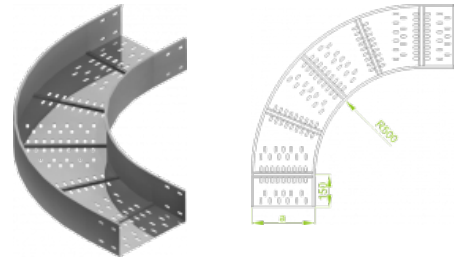

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKSC200H120	200	240722	2	10,32
KKSC300H120	300	240732	2	12,37
KKSC400H120	400	240742	2	14,91
KKSC500H120	500	240752	2	17,68
KKSC600H120	600	240762	2	20,12