

KKSMC...H120 45° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

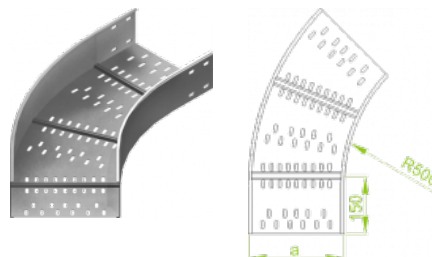

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKSMC200H120	200	240822	2	6,57
KKSMC300H120	300	240832	2	7,94
KKSMC400H120	400	240842	2	9,42
KKSMC500H120	500	240852	2	10,90
KKSMC600H120	600	240862	2	12,60