

KKSMT...H120 45° Horizontal Bend

Overview:

Application

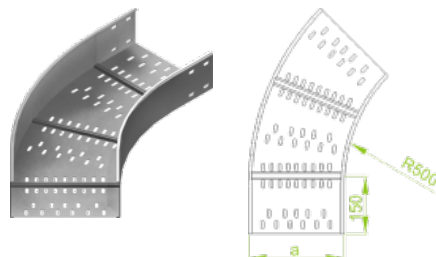
Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)


Versions:

 Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKSMT200H120	200	240823	2	8,33
KKSMT300H120	300	240833	2	9,54
KKSMT400H120	400	240843	2	11,35
KKSMT500H120	500	240853	2	13,15
KKSMT600H120	600	240863	2	15,98