

KRPBJ...H50 Vertical Elbow - Right

Overview:

Application

Transition of tray cable run in the horizontal plane to the vertical plane.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

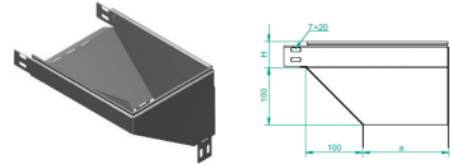

For installation use Screw Sets SGK M6×12 or SG M6×12.

Quick and convenient installation by the use of dismantled parts

This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KRPBJ50H50	50	154603	10	0,48
KRPBJ100H50	100	154703	10	0,70
KRPBJ150H50	150	154803	6	1,06
KRPBJ200H50	200	154903	6	1,41
KRPBJ300H50	300	155103	4	2,11
KRPBJ400H50	400	155203	4	2,80
KRPBJ500H50	500	155303	2	3,51
KRPBJ600H50	600	155403	2	4,22

Connected products:

