

## LLKST...H120 Adjustable Vertical Bend

### Overview:

#### Application

Diversion in cable routing. Full-range angle adjustment with a lock

#### Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)

**L**- powder coating in a full range of colours (PC)

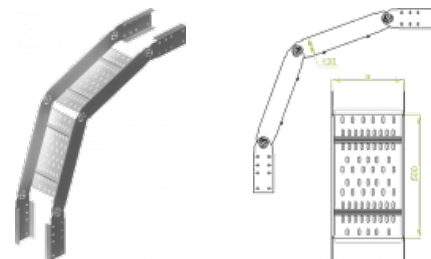

### Versions:

Sheet thickness: **2,5 mm**

| Symbol       | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|--------------|--------------|------------------|-----------------|--------------|
| LLKST200H120 | 200          | 241623           | 10              | 15,54        |
| LLKST300H120 | 300          | 241633           | 4               | 16,19        |
| LLKST400H120 | 400          | 241643           | 4               | 16,74        |
| LLKST500H120 | 500          | 241653           | 4               | 17,40        |
| LLKST600H120 | 600          | 241663           | 4               | 17,94        |