


KSP...H150 Cable Tray

Overview:

Application

Cable routing in halls or on-site with limited number of supporting structures. High tray durability allows for applying spacing of supports even every 6m.

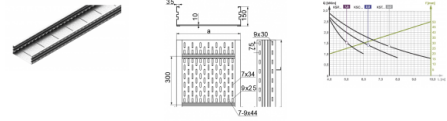

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

IMPORTANT! In case of large orders

- cable tray with perforated side profile
- cable tray from 2 up to 12m long
- cable tray: 1,2 and 2,5mm thick sheet.
Cable Tray adapted for installation of Cable Clamps: UKZ1, UKZ2

Versions:

Sheet thickness: 1,5 mm

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KSP200H150/3	3000	200	270020	2	8,18	27800
KSP200H150/6	6000	200	270021	2	8,18	27800
KSP300H150/3	3000	300	270030	2	9,14	42800
KSP300H150/6	6000	300	270031	2	9,14	42800
KSP400H150/3	3000	400	270040	2	10,10	57800
KSP400H150/6	6000	400	270041	2	10,10	57800
KSP500H150/3	3000	500	270050	2	11,06	72800
KSP500H150/6	6000	500	270051	2	11,06	72800
KSP600H150/3	3000	600	270060	2	12,02	87800
KSP600H150/6	6000	600	270061	2	12,02	87800