


KSC...H150 Cable Tray

Overview:

Application

Cable routing in halls or on-site with limited number of supporting structures. High tray durability allows for applying spacing of supports even every 6m.

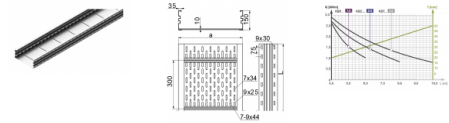

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

IMPORTANT! In case of large orders

- cable tray with perforated side profile
- cable tray from 2 up to 12m long
- cable tray: 1,2 and 2,5mm thick sheet.
Cable Tray adapted for installation of Cable Clamps: UKZ1, UKZ2

Versions:

Sheet thickness: 2,0 mm

| Symbol | Length L [m] | Width a [mm] | Catalogue number | Quantity in box | Weight [1m] | Effective section |
|--------------|--------------|--------------|------------------|-----------------|-------------|-------------------|
| KSC200H150/3 | 3000 | 200 | 270120 | 2 | 10,00 | 27800 |
| KSC200H150/6 | 6000 | 200 | 270121 | 2 | 10,00 | 27800 |
| KSC300H150/3 | 3000 | 300 | 270130 | 2 | 10,90 | 42800 |
| KSC300H150/6 | 6000 | 300 | 270131 | 2 | 10,90 | 42800 |
| KSC400H150/3 | 3000 | 400 | 270140 | 2 | 11,80 | 57800 |
| KSC400H150/6 | 6000 | 400 | 270141 | 2 | 11,80 | 57800 |
| KSC500H150/3 | 3000 | 500 | 270150 | 2 | 12,70 | 72800 |
| KSC500H150/6 | 6000 | 500 | 270151 | 2 | 12,70 | 72800 |
| KSC600H150/3 | 3000 | 600 | 270160 | 2 | 13,60 | 87800 |
| KSC600H150/6 | 6000 | 600 | 270161 | 2 | 13,60 | 87800 |