

## KST...H150 Cable Tray

### Overview:

#### Application


Cable routing in halls or on-site with limited number of supporting structures. High tray durability allows for applying spacing of supports even every 6m.

#### Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
**E**- stainless steel (SS)  
**L**- powder coating in a full range of colours (PC)

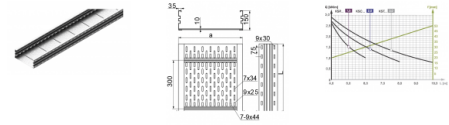

#### IMPORTANT! In case of large orders

- cable tray with perforated side profile
- cable tray from 2 up to 12m long
- cable tray: 1,2 and 2,5mm thick sheet.

Cable Tray adapted for installation of Cable Clamps: UKZ1, UKZ2

### Versions:

Sheet thickness: **3,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KST200H150/6	6000	200	270221	2	13,32	27800
KST300H150/6	6000	300	270231	2	14,22	42800
KST400H150/6	6000	400	270241	2	15,12	57800
KST500H150/6	6000	500	270251	2	16,02	72800
KST600H150/6	6000	600	270261	2	16,92	87800