

## KKSC...H150 90° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

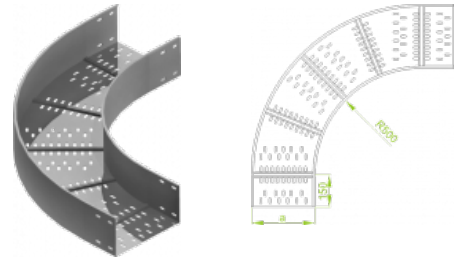

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKSC200H150	200	270722	2	11,14
KKSC300H150	300	270732	2	13,24
KKSC400H150	400	270742	2	14,69
KKSC500H150	500	270752	2	16,24
KKSC600H150	600	270762	2	19,09