

## KKSMT...H150 45° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

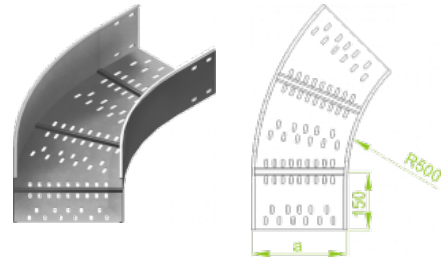

### Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
<b>KKSMT200H150</b>	<b>200</b>	<b>270823</b>	<b>2</b>	<b>9,16</b>
<b>KKSMT300H150</b>	<b>300</b>	<b>270833</b>	<b>2</b>	<b>10,85</b>
<b>KKSMT400H150</b>	<b>400</b>	<b>270843</b>	<b>2</b>	<b>12,67</b>
<b>KKSMT500H150</b>	<b>500</b>	<b>270853</b>	<b>2</b>	<b>14,54</b>
<b>KKSMT600H150</b>	<b>600</b>	<b>270863</b>	<b>2</b>	<b>16,37</b>