

## LLKSC...H150 Adjustable Vertical Bend

### Overview:

**Application**

Diversion in cable routing. Full-range angle adjustment with a lock

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

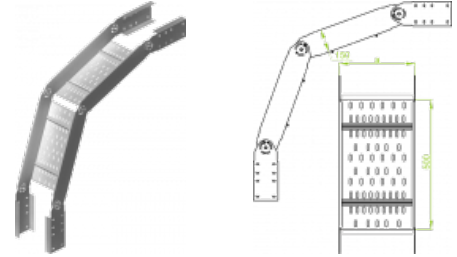

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
<b>LLKSC200H150</b>	<b>200</b>	<b>271622</b>	<b>10</b>	<b>14,02</b>
<b>LLKSC300H150</b>	<b>300</b>	<b>271632</b>	<b>4</b>	<b>14,62</b>
<b>LLKSC400H150</b>	<b>400</b>	<b>271642</b>	<b>4</b>	<b>15,13</b>
<b>LLKSC500H150</b>	<b>500</b>	<b>271652</b>	<b>4</b>	<b>15,73</b>
<b>LLKSC600H150</b>	<b>600</b>	<b>271662</b>	<b>4</b>	<b>16,23</b>