

## KKSC...H200 90° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

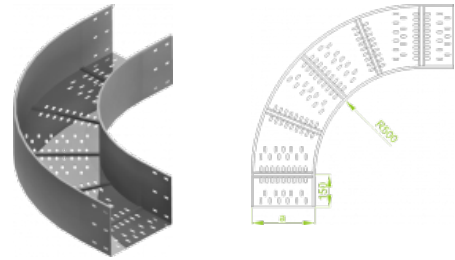

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKSC200H200	200	290722	2	13,10
KKSC300H200	300	290732	2	15,77
KKSC400H200	400	290742	2	18,44
KKSC500H200	500	290752	2	21,41
KKSC600H200	600	290762	2	24,04