

KKST...H200 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

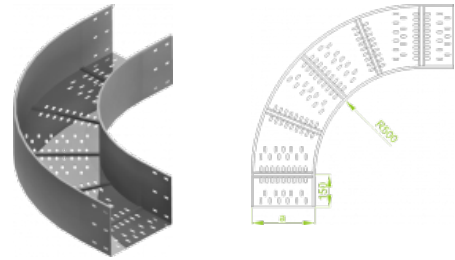

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKST200H200	200	290723	2	17,52
KKST300H200	300	290733	2	20,46
KKST400H200	400	290743	2	23,52
KKST500H200	500	290753	2	26,70
KKST600H200	600	290763	2	29,94