

KKSMT...H200 45° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

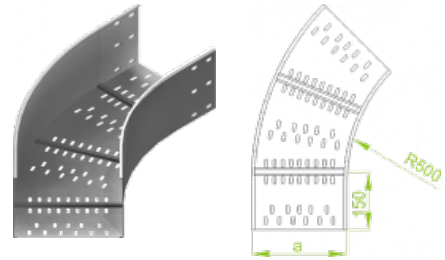

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKSMT200H200	200	290823	2	11,10
KKSMT300H200	300	290833	2	12,91
KKSMT400H200	400	290843	2	14,84
KKSMT500H200	500	290853	2	16,84
KKSMT600H200	600	290863	2	18,88