


OPNNJ...H30 Vertical Bypass

Overview:

- Application**
Bypassing mechanical obstacles in cable routing
- Material**
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)
- Available to order:**
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

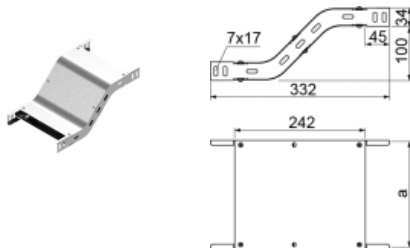

For installation use Screw Sets SGK M6×10 or SG M6×10 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling

Versions:

Sheet thickness: 1,0 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
OPNNJ50H30	50	136336	1	0,46
OPNNJ100H30	100	136337	1	0,68
OPNNJ150H30	150	136338	1	0,90
OPNNJ200H30	200	136339	1	1,12
OPNNJ300H30	300	136340	1	1,56

Connected products:










KGR...H30 Cable Tray
KGL...H30 Cable Tray
KGJ...H30 Cable Tray
KBJ...H30 Cable Tray
KBR...H30 Cable Tray
KBL...H30 Cable Tray
LPLH30 Straight Connector
LPPH30 Straight Connector






LPMH30 Straight Connector
LPMLH30 Straight Connector
SGK... Screw Set
SM... Screw Set