

## ELKST...H200 Adjustable Vertical Bend Element

### Overview:

**Application**

Diversion in cable routing. Full-range angle adjustment with a lock

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

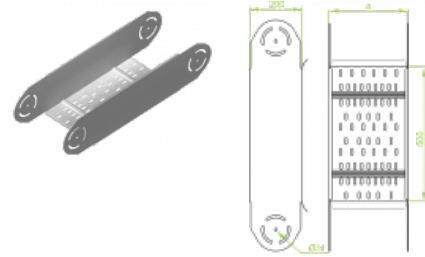

**Capability of creating vertical bends of any internal radius through joining articulated connectors. For the installation of segments of adjustable vertical bend element use Screw Sets M10x20**

### Versions:

Sheet thickness: **3,0 mm**

| Symbol       | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|--------------|--------------|------------------|-----------------|--------------|
| ELKST200H200 | 200          | 281723           | 10              | 8,40         |
| ELKST300H200 | 300          | 281733           | 4               | 8,70         |
| ELKST400H200 | 400          | 281743           | 4               | 8,99         |
| ELKST500H200 | 500          | 281753           | 4               | 9,30         |
| ELKST600H200 | 600          | 281763           | 4               | 9,60         |