

LDSC...H100 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**Fittings of any internal radius available upon request.
For joining fittings to cable ladder lengths use Straight Connector LSSU...
and sets of Screw SGK8×16**

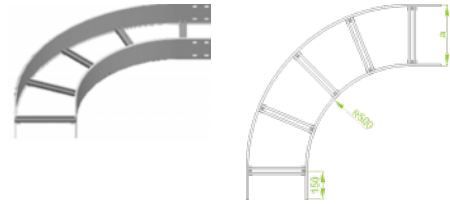

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDSC200H100	200	410922	2	5,83
LDSC300H100	300	410932	2	6,56
LDSC400H100	400	410942	1	7,58
LDSC500H100	500	410952	1	8,28
LDSC600H100	600	410962	1	9,65