

RSDST...H100 Straight Reducer

Overview:

Application

Reducing/extending widths of cable runs.

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)


L- powder coating in a full range of colours (PC)

Fittings of any internal radius available upon request.

For joining fittings to cable ladder lengths use Straight Connector LSSU...

and sets of Screw SGK M8×16

In case of special orders please specify dimensions a and b.

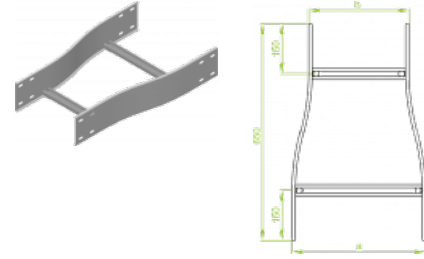

Versions:

Sheet thickness: **3,0 mm**

Symbol	Catalogue number	Quantity in box	Weight 1 pc.	Size a [mm]	Size b [mm]
RSDST300/200H100	411433	1	4,41	300	200
RSDST400/300H100	411443	1	4,61	400	300
RSDST500/400H100	411453	1	4,81	500	400
RSDST600/500H100	411463	1	5,01	600	500