

LLDSC...H100 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

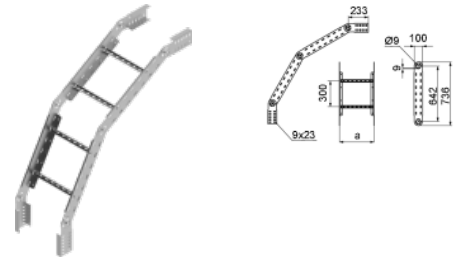

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLDSC200H100	200	413422	1	8,58
LLDSC300H100	300	413432	1	9,03
LLDSC400H100	400	413442	1	9,54
LLDSC500H100	500	413452	1	9,98
LLDSC600H100	600	413462	1	10,49